# Development of a Low-Cost and High-Speed Single Event Effects Testers based on Reconfigurable Field Programmable Gate Arrays (FPGA)

J.W. Howard[1], H. Kim[1], M. Berg[1], K.A. LaBel[2],
S. Stansberry[3], M. Friendlich[1] and T. Irwin[1]

1. GSFC/MEI Technologies, Seabrook, MD
2. NASA GSFC, Greenbelt, MD
3. Information Sciences Institute, Arlington, VA

## Outline

- Introduction
- Objectives
- Tester Descriptions
  - Overview
  - Features
  - Device Under Test (DUT) Interface
- Tester Validations and Demonstrations
- Future Work
- Summary

James W. Howard          2006 Single Event Effects Symposium - 04/14/2006

*To be presented by J. W. Howard at the 2006 Single Event Effects Symposium (SEESYM), April 10, 2006 to April 12, 2006 in Long Beach, CA.*
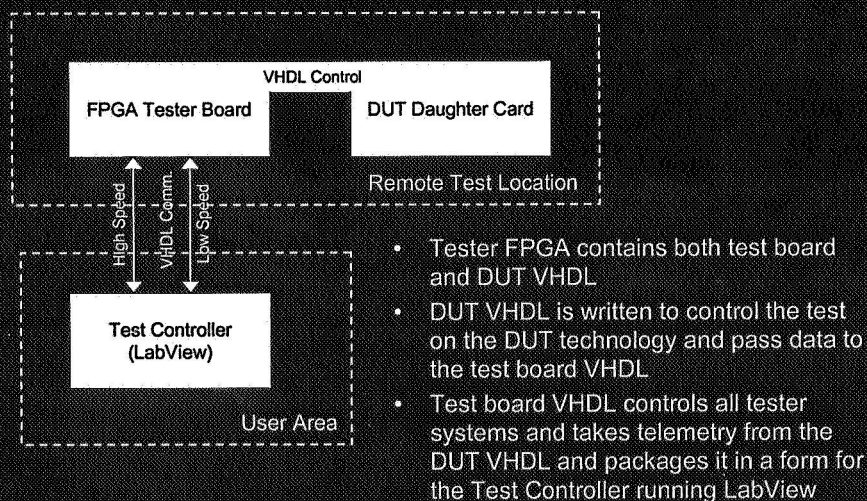
# Introduction

- NASA missions continue to push the technology limits requiring the use of state-of-the-art devices
- Increasingly complex devices need to be qualified for flight
- Speed of device operations are continuing to increase and studies have shown the importance of test "at speed"
- Costs associated with development of test fixtures, specific to the device under test, for flight qualification are growing
- "Generic" test hardware is even becoming more difficult with the rapidly changing technologies
- Answer - Develop test fixtures that are reusable and reconfigurable

# Tester Concept

VHDL Control

FPGA Tester Board    DUT Daughter Card

Remote Test Location

High Speed    VHDL Comm.    Low Speed

Test Controller (LabView)

User Area

- Tester FPGA contains both test board and DUT VHDL
- DUT VHDL is written to control the test on the DUT technology and pass data to the test board VHDL
- Test board VHDL controls all tester systems and takes telemetry from the DUT VHDL and packages it in a form for the Test Controller running LabView

*To be presented by J. W. Howard at the 2006 Single Event Effects Symposium (SEESYM), April 10, 2006 to April 12, 2006 in Long Beach, CA.*

# Objectives

- Develop a low-cost (< $2k) tester that is based on a reconfigurable FPGA
- Develop a high speed (> 1 GHz) tester that is based on a reconfigurable FPGA
- Both testers will utilize daughter-cards that will allow at-speed testing of devices
- The low-cost tester will test in the 100's of MHz and still be considered "disposable" to allow proton testing
- The high-speed tester will allow testing of state-of-the-art devices at speed (up to low GHz)
- Fast-response latchup protection circuitry will be designed into both testers

# Low-Cost Tester Features
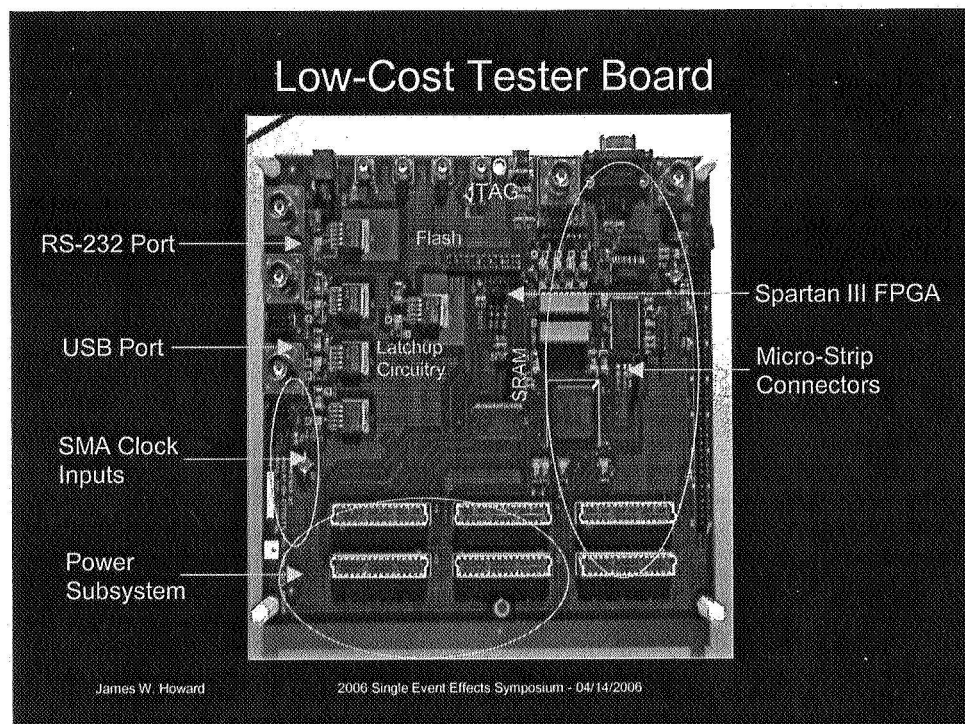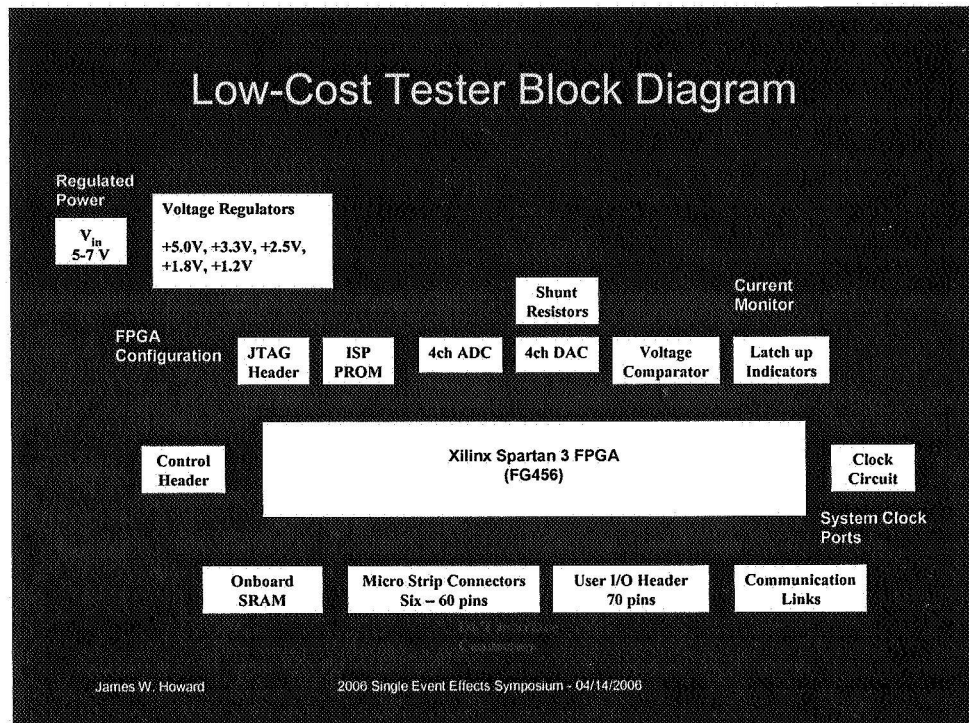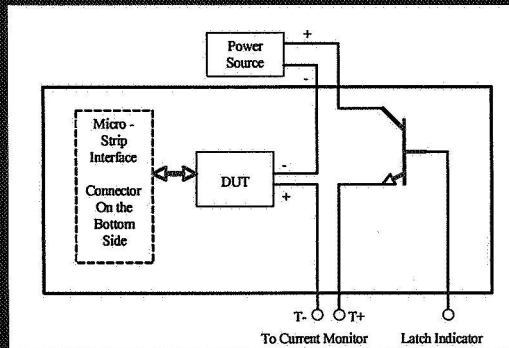
- Xilinx Spartan III FPGA (XC3S1000-4FG456)
- On-tester regulated power at 1.2, 1.8, 2.5, and 3.3 Volts
- Communications with test controller via RS-232, USB or parallel header
- On-board SRAM (1M x 16)
- DUT connected via 6 x 60-pin low-noise high-speed micro-strip connectors and 1 x 70-pin low-speed header connector
- I/O Operational Speed to 200 MHz
- FPGA configurable via JTAG, on-board Flash memory, or parallel header
- 4 SMA Connector Clock inputs or user-supplied oscillator
- 4-channel ADC for current monitoring and latchup protection
- 4-channel (independent) latchup protection via the FPGA (Slow) or micro-strip flag line to DUT card (Fast)

*To be presented by J. W. Howard at the 2006 Single Event Effects Symposium (SEESYM), April 10, 2006 to April 12, 2006 in Long Beach, CA.*

Low-Cost Tester Block Diagram



Low-Cost Tester Board

*To be presented by J. W. Howard at the 2006 Single Event Effects Symposium (SEESYM), April 10, 2006 to April 12, 2006 in Long Beach, CA.*
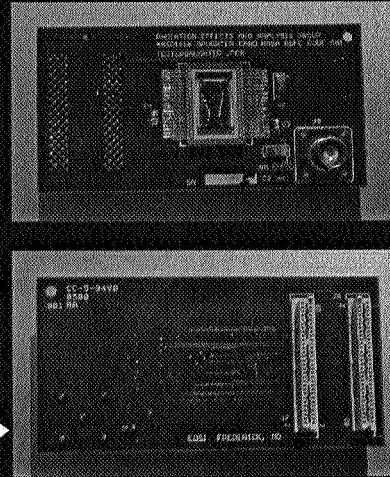
## Low-Cost Tester Daughter Card



Example of Daughter Card Design

Daughter Card for SDRAM without
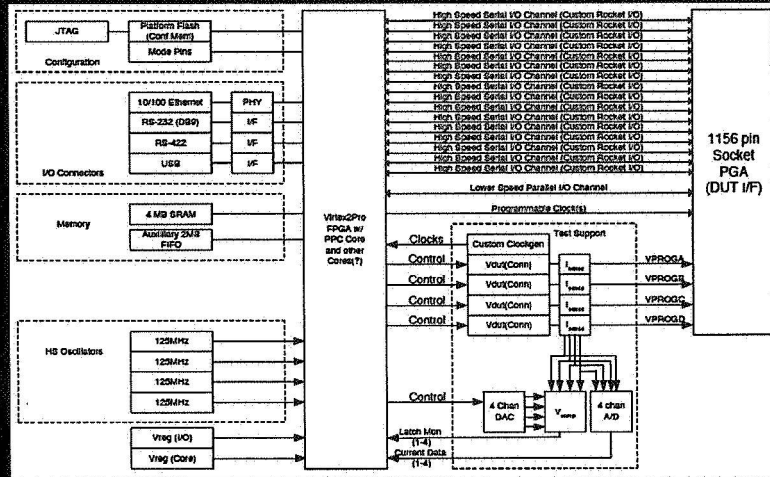Latchup Protection Transistor ➡

## High-Speed Tester Features

- Xilinx Virtex 2 Pro (XCV2VP50-5FF1152C)
  - 692 High Speed I/O (600 MHz)
  - 16 Very High Speed Rocket I/O (3 GHz)
  - PowerPC 405 processor core
- On-tester regulated power at 1.5, 1.8, 2.5, and 3.3 Volts
- Four programmable (via FPGA) regulators for DUT power
- Communications with test controller via RS-232, RS-422, USB, or 10/100 Ethernet
- On-board SRAM (1M x 32)
- On-board FIFO (256k x 32)
- DUT connected via 1156-pin PGA connector capable of I/O > 9 GHz
- FPGA configurable via JTAG or on-board Flash memory
- 4 SMA Connector Clock inputs or user-supplied oscillator
- 4-channel ADC for current monitoring and latchup protection
- 4-channel (independent) latchup protection via the FPGA (Slow) or micro-strip flag line to DUT card (Fast)

*To be presented by J. W. Howard at the 2006 Single*
*Event Effects Symposium (SEESYM), April 10,*
*2006 to April 12, 2006 in Long Beach, CA.*
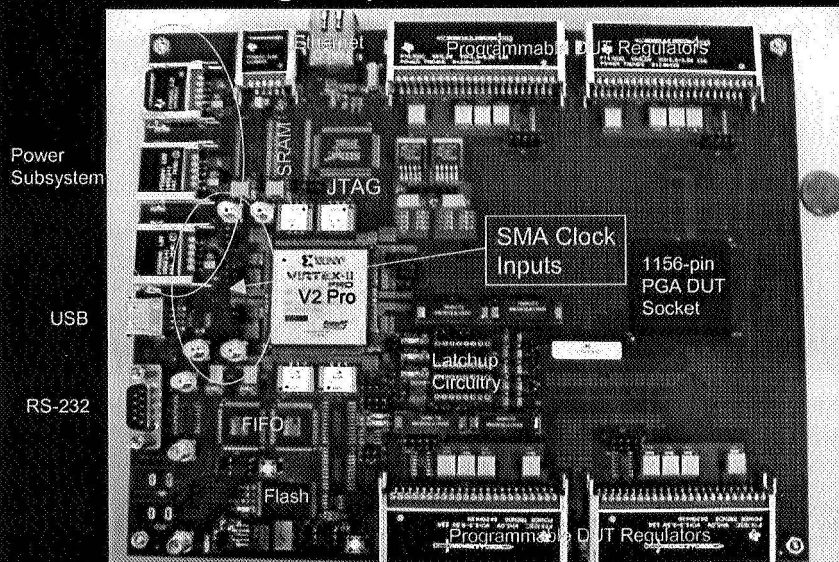
# High-Speed Tester Block Diagram



James W. Howard      2006 Single Event Effects Symposium - 04/14/2006

# High-Speed Tester Board



James W. Howard      2006 Single Event Effects Symposium - 04/14/2006

# High-Speed Tester Daughter Card



Example of Daughter Card Design

Daughter Card for SDRAM without
Latchup Protection Transistor

James W. Howard          2006 Single Event Effects Symposium - 04/14/2006
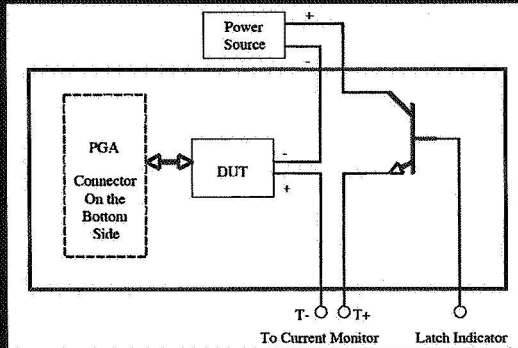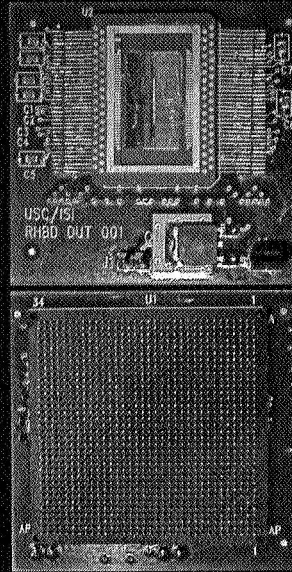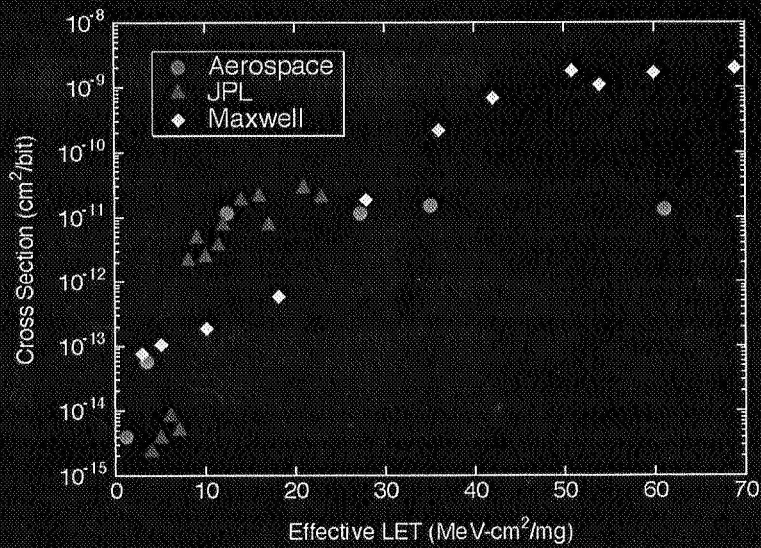
# Verification Testing



James W. Howard          2006 Single Event Effects Symposium - 04/14/2006

*To be presented by **J. W. Howard** at the 2006 Single
Event Effects Symposium (SEESYM), April 10,
2006 to April 12, 2006 in Long Beach, CA.*

## Tests Completed/Scheduled

- **Low-cost tester**
  - Maxwell SDRAM
  - Actel RTSX & RTAX
  - SRAM & SDRAM (for NSWC Crane)
  - DRAM (for NRL)
  - LSI Arithmetic Logic Unit
  - Micron 2G Flash
  - Aeroflex Eclipse
  - Boeing HBD Test Chip
  - Xilinx SPARTAN III
  - To be tested
    - Honeywell & Freescale MRAM
    - Samsung 1G DDR SDRAM
- **High-speed tester**
  - Maxwell SDRAM

James W. Howard          2006 Single Event Effects Symposium - 04/14/2006

## In Progress & Future Work

- In Progress
  - Tester Board VHDL is being "black boxed"
  - LabView Test Controller software is being converter to a stand-alone application
  - Tester documentation is currently in draft form and will be finalized upon completion of above
- Future
  - Validation testing of the high-speed tester operating at GHz
  - Version 2 of the high-speed tester under consideration that would be based on the Virtex 4 FPGA

James W. Howard          2006 Single Event Effects Symposium - 04/14/2006

*To be presented by **J. W. Howard** at the 2006 Single Event Effects Symposium **(SEESYM), April 10, 2006** to April 12, 2006 **in Long Beach, CA.***

# Summary

- Completed design, build and validation testing of a low-cost FPGA-based reconfigurable test board
- Completed design, build and validation testing of a high-speed FPGA-based reconfigurable test board
- Low-cost tester has become an integral part of the Single Event Effects testing done at GSFC
- Currently working on making testers "user-friendly" enough to allow for design and documentation distribution
- Considering design for Rev 2 of both testers and am interested in comments and suggestions

James W. Howard    2006 Single Event Effects Symposium - 04/14/2006

*To be presented by J. W. Howard at the 2006 Single Event Effects Symposium (SEESYM), April 10, 2006 to April 12, 2006 in Long Beach, CA.*